

Rec'd PCT/PTO 15 JUN 2005

PCT/IB 03/05262

10/039368

18.11.03



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

REC'D 27 NOV 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02080366.4

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr:  
Application no.: 02080366.4  
Demande no:

Anmeldetag:  
Date of filing: 18.12.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

A gas bearing system

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

F16C32/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SI SK

A gas bearing system

EPO - DG 1

18.12.2002

(75)

The invention is related to a gas bearing system comprising two opposing substantial parallel bearing surfaces and at least one gas duct for supplying gas through an orifice to the bearing gap between said bearing surfaces.

The gas bearing system may have substantially flat bearing surfaces, so that it can be used to support and guide a member making a translating movement. Such gas bearing systems are frequently used as guiding and supporting elements in high precision machines. The bearing surfaces may also have a cylindrical shape, whereby a rotating member can be supported. Also other shapes - adapted to the relative movement of the bearing surfaces - are possible, for example a spherical shape to support a member making a tumbling movement.

In general, such gas bearing system must have a relative high stiffness, but there must also be an effective damping of vibrations in the bearing system, especially in case the gas bearing system is used in high precision machines, like coordinate measuring machines.

To achieve high servo performance, gas bearings have to fulfil certain requirements with respect to stiffness and damping. Especially when gas bearings are used in high precision machines, the stiffness and damping of the gas bearing may have a significant influence on the entire dynamic performance of the machine. Often, such gas bearings are optimized with respect to stiffness, but to achieve high servo performance, damping is an important issue as well.

The object of the invention is to provide an improvement of gas bearing systems resulting in a considerable higher damping, whereby the stiffness remains relative high.

In order to accomplish that objective, at least one of said bearing surfaces is provided with at least one cavity extending over  $0.3 \text{ mm}^2$  to  $3 \text{ mm}^2$ , preferably over  $0.5 \text{ mm}^2$  to  $2 \text{ mm}^2$ , of said at least one bearing surface. In one preferred embodiment the content of said cavity is between  $0.3 \text{ mm}^3$  and  $4 \text{ mm}^3$ , preferably between  $0.5 \text{ mm}^3$  and  $2 \text{ mm}^3$ , and more preferably between  $0.7 \text{ mm}^3$  and  $1.5 \text{ mm}^3$ . One or more cavities may be present in one of the bearing surfaces, but also both bearing surfaces may be provided with such cavities.

In practice it has appeared that such a cavity, and especially more of such cavities, has only little influence on the stiffness of the bearing, so that the stiffness remains high, but the presence of such cavities increase the capacity of damping vibrations in the system considerably.

5 In one preferred embodiment said gas duct supplies gas to said cavity through an orifice in the wall of said cavity. In case there are more than one gas supply duct, each of the gas supply ducts may be provided with a cavity at its mouth, and apart from that more cavities may be present in the bearing surfaces.

10 A gas bearing system provided with a cavity at the mouth of the gas supply duct is disclosed in US-A-4844194, whereby a number of cavities are present in one of the bearing surfaces, and whereby an orifice for supplying gas to the bearing gap between the substantial parallel bearing surfaces is present in the wall of each cavity. The dimensions of the cavities are very small, but its diameter parallel to said bearing surfaces is large to avoid a throttle effect between the mouth of the orifice and the opposing bearing surface. Without the  
15 small cavity there would be a relative strong and varying throttle effect at the mouth of the orifice, caused by the small and varying distance between the two bearing surfaces. The distance between the two substantial parallel bearing surfaces is for example between 0.005 mm and 0.01 mm, and the diameter of the orifice is for example between 0.1 mm and 0.2 mm.

20 Preferable, the depth of the cavity is at least two times, preferably at least four times, more preferably at least six times the diameter of said orifice, whereby said orifice has a diameter between 0.05 mm and 0.3 mm, preferably between 0.07 mm and 0.25 mm, and more preferably between 0.1 mm and 0.2 mm.

25 In a preferred embodiment the dimension of the cavity in a direction parallel to said bearing surface is between 0.5 mm and 2.5 mm, preferably between 0.5 mm and 1.5 mm, more preferably between 0.7 mm and 1.2 mm. Thereby the cavity may have a substantial cylindrical shape, whereby the cylindrical axis is directed substantially perpendicular to said substantial parallel bearing surfaces. Such cavity can easily be manufactured by a material removing drill operation.

30 Preferably, the depth of the cavity is between 0.3 mm and 2 mm, more preferably between 0.5 mm and 1.5 mm, and in a more preferred embodiment between 0.7 mm and 1.2 mm.

Very good results have been achieved in a gas bearing system comprising a square flat bearing surface with sides of 40 mm, whereby one of the bearing surfaces is

provided with four cylindrical cavities having a diameter of 1.5 mm and a depth of 1 mm, and whereby the gas supply duct debouches into one of the cavities, whereby the diameter of the orifice is 0.15 mm.

5 The inventions furthermore relates to a high precision machine comprising a gas bearing system as described above.

10 The invention will now be explained in more detail hereinafter by means of a description of different embodiments of a gas bearing system provided with flat bearing surfaces, in which reference is made to a drawing, in which:

Fig. 1 is a sectional view in perspective of a prior art gas bearing system;

Fig. 2 is a similar view of a first embodiment of a gas bearing system according to the invention;

15 Fig. 3 is a similar view of a second embodiment of a gas bearing system according to the invention; and

Fig.4 shows again a prior art gas bearing system.

20 The figures are merely schematic representations of the embodiments, in which some dimensions are out of proportion to achieve a better representation of relevant details.

25 Figure 1 shows a gas bearing system comprising a first bearing member 1 having a bearing surface 2, opposing a second bearing surface 3 of a second bearing member 4. According to this embodiment both bearing surfaces 2,3 are flat planes and the bearing surfaces 2,3 are directed parallel to each other. The bearing members 1,4 may be made from metal or plastic or another material.

30 Between the two bearing surfaces 2,3 is a bearing gap 5 in which air, or another gas, is brought through air supply duct 6 in bearing member 1. Air supply duct 6 terminates near bearing surface 2 and is connected with bearing gap 5 by an orifice 7 restricting the airflow.

The first bearing member 1 can be present at a fixed location in a machine, while the second bearing surface 3 of the second bearing member 4 can move over the fixed first bearing surface 2, to guide and support another part of the machine. Bearing member 4 is thereby supported by an air cushion in the bearing gap 5 between the two bearing surfaces

2,3. More than one orifice 7 can be present to supply air to the bearing gap 5 between the two bearing surfaces 2,3 to maintain the air cushion. It is also possible to provide the moving bearing member 4 with an air supply duct instead of the air supply duct 6 in bearing member 1, or additional to air supply duct 6.

5           The dimensions of the bearing system can be as follows. The bearing surfaces 2,3 may have a dimension of about 20 cm<sup>2</sup>. The distance between the two bearing surfaces 2,3 can be between 0.005 mm and 0.01 mm. The diameter of the orifice 7 can be between 0.1 mm and 0.2 mm, and its length is for example 1 mm.

10           Figure 2 shows a first embodiment of a gas bearing system according to the invention. Thereby the bearing surface 2 is provided with one cavity 8 and with two cavities 9. All three cavities 8,9 have a cylindrical shape with a diameter of 1.5 mm and a length (or depth) of 1 mm. The axis of the cylinder is directed perpendicular to the bearing surface 2.

15           Each cavity 9 is closed at all sides, except for the side facing the bearing gap 5. Air supply duct 6 is connected with cavity 8 by orifice 7 in the bottom of cavity 8, so that the supplied air flows through the cavity 8 before it reaches the bearing gap 5 between the two bearing surfaces 2,3.

20           It has been found out that the presence of one or more cavities 8,9 in the bearing surface 2,3 results in a considerable increase of the capacity of damping vibrations in the gas bearing system, i.e. vibrations of bearing member 4 relative to bearing member 1, while the stiffness of the bearing system remains high.

25           Figure 3 shows a second embodiment of the gas bearing system according to the invention, whereby similar parts are indicated with the same reference numbers as in figure 2. In this embodiment the axis 12 of the air supply duct 6 is positioned parallel to the bearing surface 2. There are a number of orifices 7 between the air supply duct 6 and the bearing gap 5 between the two bearing surfaces 2,3, only two of such orifices are shown in figure 3. The cavities 8 as well as the orifices 7 are manufactured by a material removing drill operation.

30           An additional advantage of making use of the cavities 8 in the gas bearing system as shown in figure 3 is the presence of more material between the air supply duct 6 and the bearing surface 2. The thickness of that material equals the length of the orifice 7 plus the depth of the cavity 8. This increased thickness facilitates the manufacturing of bearing member 1 of the gas bearing system. The dimension 10 of that material, i.e. said thickness, is indicated in figure 3.

Figure 4 shows a similar gas bearing system according to the prior art, whereby dimension 11 is also the distance between air supply duct 6 and bearing surface 2. Because the length of orifice 7 is limited, said dimension 11 is much smaller than dimension 10 in figure 3, so that there is only a very small thickness of the material between air supply duct 6 and bearing surface 2.

The embodiments as described above are merely examples; a great many other embodiments are possible, for example gas bearing systems having cylindrical bearing surfaces, whereby one of the bearing members rotate around the axis of the cylinder and cavities are present in at least one of the bearing surfaces for damping vibrations in the system. Also other shapes – adapted to the relative movement of the bearing surfaces 2,3 – are possible, for example a spherical shape to support a bearing member 4 making a tumbling movement.

## CLAIMS:

EPO - DG 1

18. 12. 2002

(75)

1. A gas bearing system comprising two opposing substantial parallel bearing surfaces and at least one gas duct for supplying gas through an orifice to the bearing gap between said bearing surfaces, characterized in that at least one of said bearing surfaces is provided with at least one cavity extending over  $0.3 \text{ mm}^2$  to  $3 \text{ mm}^2$  of said at least one bearing surface.
2. A gas bearing system as claimed in claim 1, characterized in that said cavity extends over  $0.5 \text{ mm}^2$  to  $2 \text{ mm}^2$  of the bearing surface.
3. A gas bearing system as claimed in any one of the preceding claims, characterized in that the content of said cavity is between  $0.3 \text{ mm}^3$  and  $4 \text{ mm}^3$ , preferably between  $0.5 \text{ mm}^3$  and  $2 \text{ mm}^3$ , more preferably between  $0.7 \text{ mm}^3$  and  $1.5 \text{ mm}^3$ .
4. A gas bearing system as claimed in any one of the preceding claims, characterized in that said gas duct supplies gas to said cavity through an orifice in the wall of said cavity.
5. A gas bearing system as claimed in any one of the preceding claims, characterized in that the depth of the cavity is at least two times, preferably at least four times, more preferably at least six times the diameter of said orifice.
6. A gas bearing system as claimed in any one of the preceding claims, characterized in that said orifice has a diameter between  $0.05 \text{ mm}$  and  $0.3 \text{ mm}$ , preferably between  $0.07 \text{ mm}$  and  $0.25 \text{ mm}$ , more preferably between  $0.1 \text{ mm}$  and  $0.2 \text{ mm}$ .
7. A gas bearing system as claimed in any one of the preceding claims, characterized in that the dimension of the cavity in a direction parallel to said bearing surface is between  $0.5 \text{ mm}$  and  $2.5 \text{ mm}$ , preferably between  $0.5 \text{ mm}$  and  $1.5 \text{ mm}$ , more preferably between  $0.7 \text{ mm}$  and  $1.2 \text{ mm}$ .



8. A gas bearing system as claimed in any one of the preceding claims, characterized in that the cavity has a substantial cylindrical shape, whereby the cylindrical axis is directed substantially perpendicular to said substantial parallel bearing surfaces.

5

9. A gas bearing system as claimed in any one of the preceding claims, characterized in that the depth of the cavity is between 0.3 mm and 2 mm, preferably between 0.5 mm and 1.5 mm, more preferably between 0.7 mm and 1.2 mm.

10 10. A high precision machine comprising a gas bearing system, characterized by a gas bearing system as claimed in any one of the preceding claims.

## ABSTRACT:

A gas bearing system comprising two opposing substantial parallel bearing surfaces (2,3) and at least one gas duct (6) for supplying gas through an orifice (7) to the bearing gap (5) between said bearing surfaces (2,3). At least one of said bearing surfaces (2,3) is provided with at least one cavity (8,9) extending over  $0.3 \text{ mm}^2$  to  $3 \text{ mm}^2$  of said at least one bearing surface (2,3). The content of said cavity (8,9) may be between  $0.3 \text{ mm}^3$  and  $4 \text{ mm}^3$ . The gas duct (6) may supply gas to said cavity (8) through an orifice (7) in the wall of said cavity (8).

Fig. 2

EPO - DG 1

18. 12. 2002

(75)

1/1

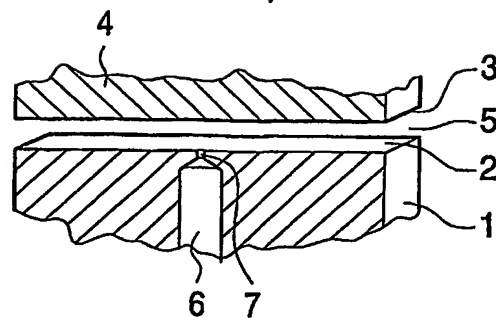


FIG. 1

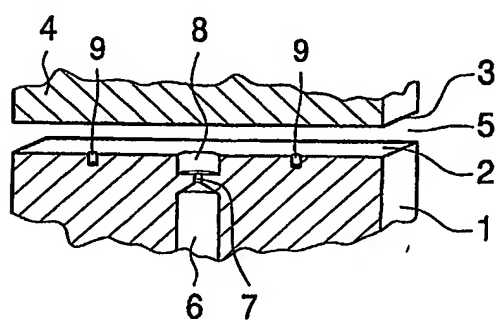


FIG. 2

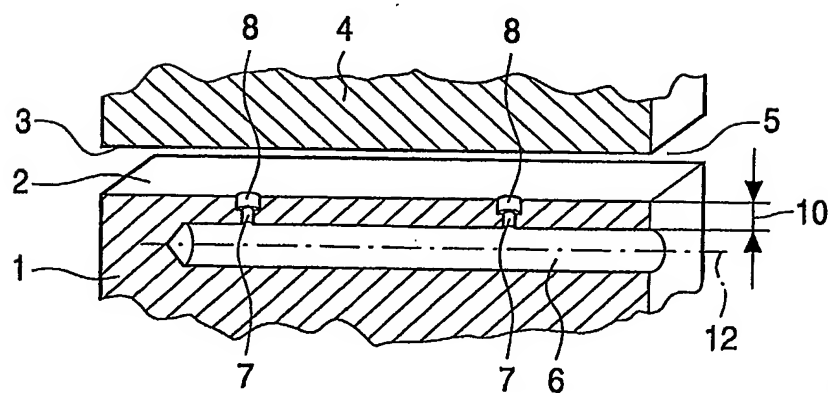


FIG. 3

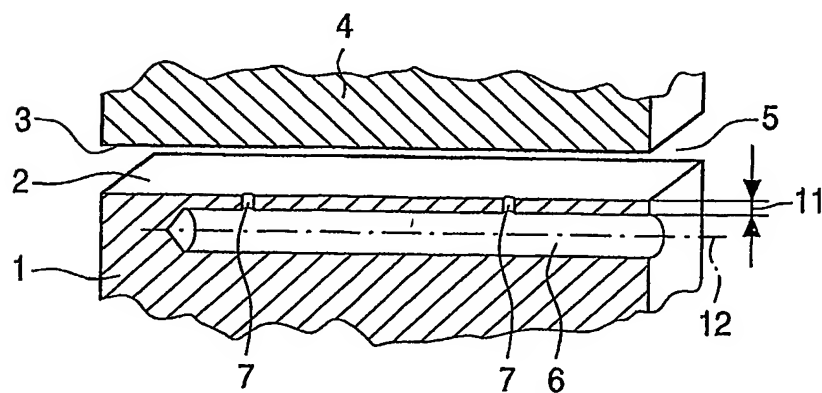


FIG. 4

